



TWIN LIP is a continuous rubber skirt with multiple lip sealing design. The rubber skirt is affixed to the skirt plate by, means of a metal clamp which makes it very easy to install and maintain. It prevents spillage without frequent maintenance compared to traditional design.

It operates even on belts with very less free edge. Special rubber formulation offers excellent wear and abrasion properties.

TWIN LIP is available in standard length of 30ft (10 m) and is suitable for belts of all troughing angles. Continuous length up to 150 ft (50 m) can be made on demand.




SALIENT FEATURES

TWIN

LIP[®] SKIRT BOARD SEALING

- Excellent for dust containment.
- Works on belts even with free edges as less as 50 mm.
- Offers a dual sealing system in a one piece construction which offers ease of installation.
- Superior Rubber Compound offers excellent wear resistance and very low-abrasion.
- Can be installed on flat belts and 20°, 35° and 45°
 Troughing angle.
- Light Duty, Standard Duty and Heavy Duty designs available.

FREE EDGE REQUIREMENT




Troughing Angle	Free Edge In (mm)					
	Light Duty	Standard Duty	Heavy Duty			
0°	-	3 (80)	3.75 (95)			
20°	2.5 (65)	4 (100)	4.75 (120)			
35°	3.5 (90)	4.25 (110)	5.25 (130)			
45°	3.75 (95)	4.5 (115)	5.5 (135)			


SPECIFICATIONS


Duty Type	Assembly P/N*	Dim A In (mm)	Dim B In (mm)	Dim C In (mm)	Dim D In (mm)	Rubber Hardness(Shore A)	
						Grade N	Grade H
Light Duty	TTL-LD-X-XX	4.5 (114)	1/2 (13)	1/2 (13)	2/3 (16)	60 +/-5°	70 +/-5°
Standard Duty	TTL-SD-X-XX	6.5 (165)	1/2 (13)	3/4 (20)	1 (25)	60 +/-5°	70 +/-5°
Heavy Duty	TTL-HD-X-XX	6 (150)	2/3 (16)	1.25 (32)	1 (25)	60 +/-5°	70 +/-5°

* Replace X with N for 60 Shore A hard rubber & H for 70 Shore A hard rubber ** Replace XX with 01 for EASY Fix Clamp & 02 for Standard Clamp. For Stainless Steel Clamp, add 'SS' to the end of the part number




TWIN LIP - LD





TWIN LIP - HD

ACCESSORIES & SPARES

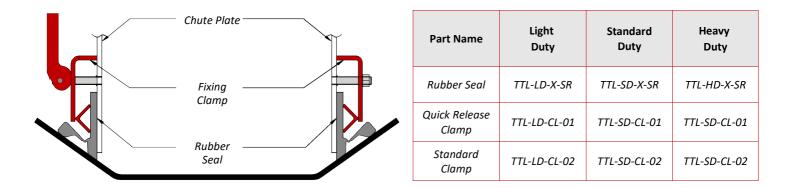

THEJO offers a complete package including design, supply, consultancy, technical support, service back-up and maintenance to assure that our clients will obtain the best benefits at the lowest cost for any trouble shooting and improvement needed in the plant.

* For more information please contact your nearest Thejo representative.

TWIN LIP® SKIRT BOARD SEALING SYSTEM



THEJO ENGINEERING LTD. 5, Kalmia Road, Bibra Lake, Australia WA 6163

Global Network

• Australia • Brazil • Chile • India • Saudi Arabia