

QWIK FIX®


SKIRT SEALING SYSTEM

The QWIK FIX SKIRT SEALING is a simple and effective two-part skirting system that prevents dust and spillage and reduce clean-up and maintenance costs at installations.

The QWIK FIX conveyor skirting system can easily be retrofitted to your existing chute walls. Stitch weld the steel back plates to the chute wall, insert the skirting into the serrated slots, and adjust the skirting to the belt.

The skirt material is superior quality press moulded rubber which gives a much longer life than conventional conveyor skirting.

The skirting can be easily adjusted pushing down or tapping with a mallet which means minimum down time. The worn-out skirt can be just peeled-away for replacement. Sealing strips come in lengths of 1 meter or 200mm long segments with overlapping joints, for a spillage free sealing.

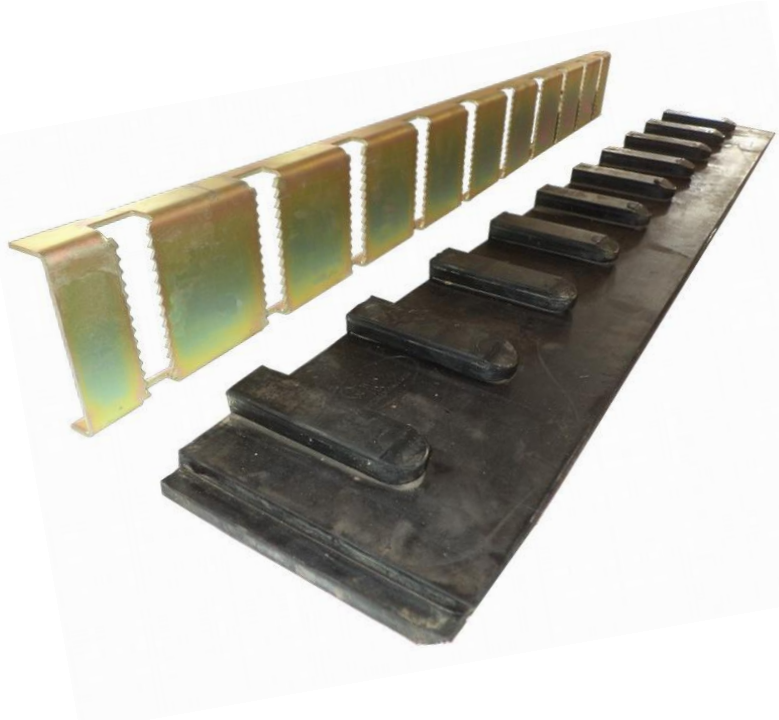

SPECIFICATIONS

- Fastener free design, No nuts, bolts, clamps or fasteners to worry about.
- Available in many sizes, thickness and compounds to suit various working conditions.
- Segmented and continuous design to meet various installation requirements.
- Overlapping design for the joints, for a spillage free sealing.
- Self - adjusting rubber contours and flexes with the belt to prevent dust leakage.
- Less frequent inspection and minimal maintenance required for the skirt.


Type of Sealing	Continuous	Segmented
Maximum Service Temp. F (Deg. C)	Continuous - 160	Continuous - 160
Hardness (shore A)	55 +/- 5	55 +/- 5
Max. Belt Speed Fpm (m/s)	900 (4.6)	900 (4.6)

SPECIFICATIONS

Type of Seal	Assembly P/N*	Skirt Thickness in. (mm)	Dim A in. (mm)	Dim B in. (mm)	Dim C in. (mm)	Dim D in. (mm)
Continuous	TQF-X-X-C	0.75 (20)	40 (1021)	4 (105)	40 (1021)	6.5 (165)
Segmented	TQF-X-X-S	0.75 (20)	40 (1021)	4 (105)	8 (200)	8 (200)

* Replace 1st X with 3 for 3mm back plate and 5 for 5mm back plate.
 Replace 2nd X with N if operating temperature is <70° C & H if operating temperature is <70° C.

** Replace X with N if operating temperature is <70° C & H if operating temperature is <70° C

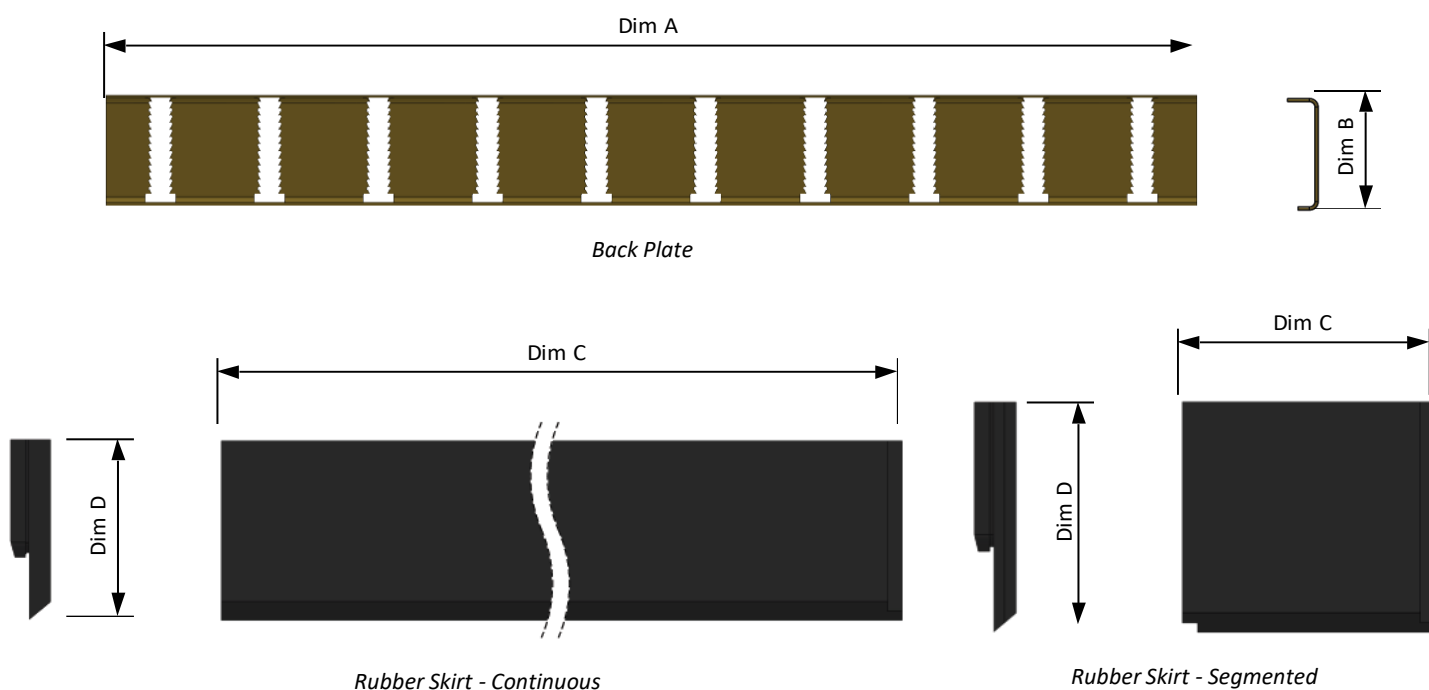

ACCESSORIES & SPARES

THEJO offers a complete package including design, supply, consultancy, technical support, service back-up and maintenance to assure that our clients will obtain the best benefits at the lowest cost for any trouble shooting and improvement needed in the plant

Spare Rubber Skirt-Continuous	TQF-SP-RB-X-C
Spare Rubber Skirt-Segmented	TQF-SP-RB-X-S
Back Plate -3 mm thick	TQF-SP-BP-T1
Back Plate - 5 mm thick	TQF-SP-BP-T2

* For more information please contact your nearest Thejo representative.